


## PANEL HOLE SIZE

Panel thickness	X
0.8-1.2	31.4
1.3-2.0	31.6

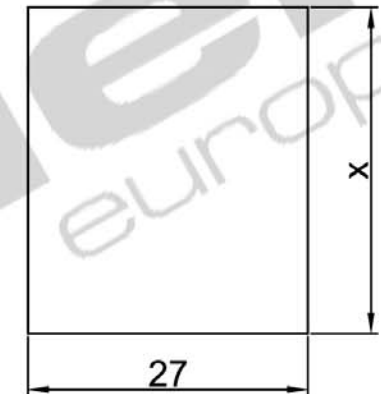

## SPECIFICATIONS

1. RATING: 10A 250VAC ENEC UL
2. INSULATION RESISTANCE: DC 500V 100M OHMS Min
3. DIELECTRIC STRENGTH: 2000VAC/1 Minute
4. HOUSING MATERIAL: Nylon 66 UL 94v-2 or 94v-0



**RL-10-1F-2-0-P1**

TITLE	SERIES
POWER SOCKET WITHOUT FUSE	FUNCTION
2014-09-09	DRAWING NUMBER